

Features

- ◆ Reduce magnetic distortion with non-magnetic substances
- ◆ Clear and Dynamic sound quality
- ◆ High anti-humidity characteristics with special insulation paint
- ◆ RoHS compliant


Type Designation

AMRS 1/2W 100Ω J T26

① ② ③ ④ ⑤


①	Product Type	AMRS	
②	Power Rating	1/4W, 1/2W	
③	Nominal Resistance	E-24 Series	
④	Resistance Tolerance	J	± 5 %
		G	± 2 %
		F	± 1 %
⑤	Taping & Forming	Blank	Straight, Bulk
		L	Forming with Kink
		M	Forming without Kink
		T26	Axial Taping 26mm (1/4W & 1/2W)
		T52	Axial Taping 52mm (1/2W only)
	U	Radial Taping	

Construction and Materials

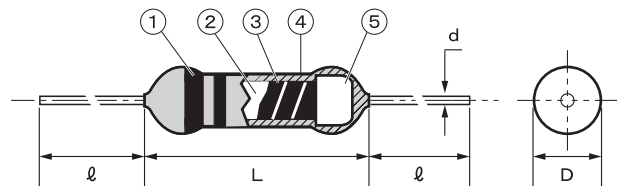

Parts Name	Material
① Color Code	Epoxy resin
② Ceramic base	Procelain rod (alumina)
③ Resistor film	Carbon film
④ Coating	Epoxy resin / Color : Blue
⑤ Terminal	Cap : Tin plated Brass
	Lead : Tin plated copper wire (OFC)

Derating Curve

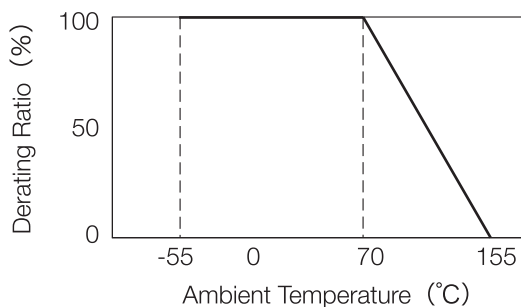

Dimensions : Straight

Type	L	D	l	d
AMRS 1/4	6.6 ± 1.0	2.4 ± 0.4	27min	0.6 ± 0.1
AMRS 1/2	8.8 ± 1.0	2.8 ± 0.4	25min	0.7 ± 0.1

(mm)

Rating

Type	Power Rating (W)	Max.Working Voltage (V)	Max.Overload Voltage (V)	Dielectric Withstanding Voltage (V)	Resistance Range (Ω)	Rated Ambient Temp. (°C)	Operating Temp. Range (°C)
AMRS 1/4W	0.25	300	600	500	10 ~ 1.5M	+70°C	-55~+155°C
AMRS 1/2W	0.5	350	700	700	10 ~ 1.5M	+70°C	-55~+155°C

The rated voltage shall be calculated by square root ($E \times R$)

When this value exceeds a maximum working voltage given in table, this maximum working voltage shall taken as the rated voltage.

E ; rated voltage (V) P ; rated dissipation (W) R ; nominal resistance value (Ω)

Amtrans corporation

Bandai-Bld 2F, 2-10-14 Kanda-Awaji-cho, Chiyoda-ku, Tokyo, 101-0063, Japan
Tel : 81-3-5294-0301 / Fax : 81-3-5294-0302

[E-Mail] audio@amtrans.co.jp [URL] <http://www.amtrans.co.jp>

