


Features

- High quality sound film capacitor
- Metalized PET film capacitor with 630V rated voltage suitable for tube amplifiers
- Gold plated OFC lead wire without nickel ground
- Specially designed structure to reduce current distortion
- RoHS compliant

Specifications

Operating temperature range	-40°C~+100°C
Rated voltage	630V DC (2J)
Rated capacitance range (μF)	0.01/0.022/0.033/0.047/0.1/0.22/0.33/0.47/1
Rated capacitance tolerance	±20% (M)
Dissipation factor	< 0.01% (at 1kHz, 20°C)
Insulation resistance	> 15,000MΩ (C > 0.33μF) > 5,000MΩ (C > 0.47μF)
Body	Epoxy resin (Black)

Dimensions

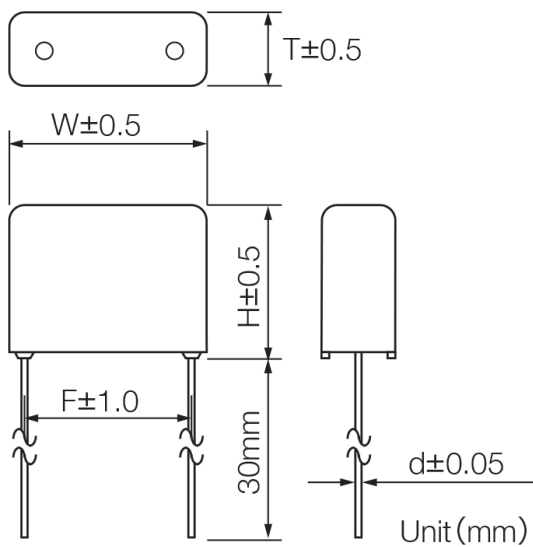

Type	Capacitance μF±20%	Dimension(mm)				
		W	H	T	F	d
Amco103	0.01	17.0	12.0	5.0	15.0	0.6
Amco223	0.022		12.5	5.5		
Amco333	0.033		13.0	6.5		
Amco473	0.047	25.0	16.0	10.0	22.5	0.8
Amco104	0.1		19.5			
Amco224	0.22	30.0	22.0	11.0	27.5	
Amco334	0.33		24.5	13.5		
Amco474	0.47		30.5	20.0		
Amco105	1.0	36.0	30.5	20.0	32.5	